


An ISO 9001 : 2008 certified Company

# EE ELECTROMECH EQUIPMENTS

Manufacturer of Mechanical Counters & Petrolpump Totalizers

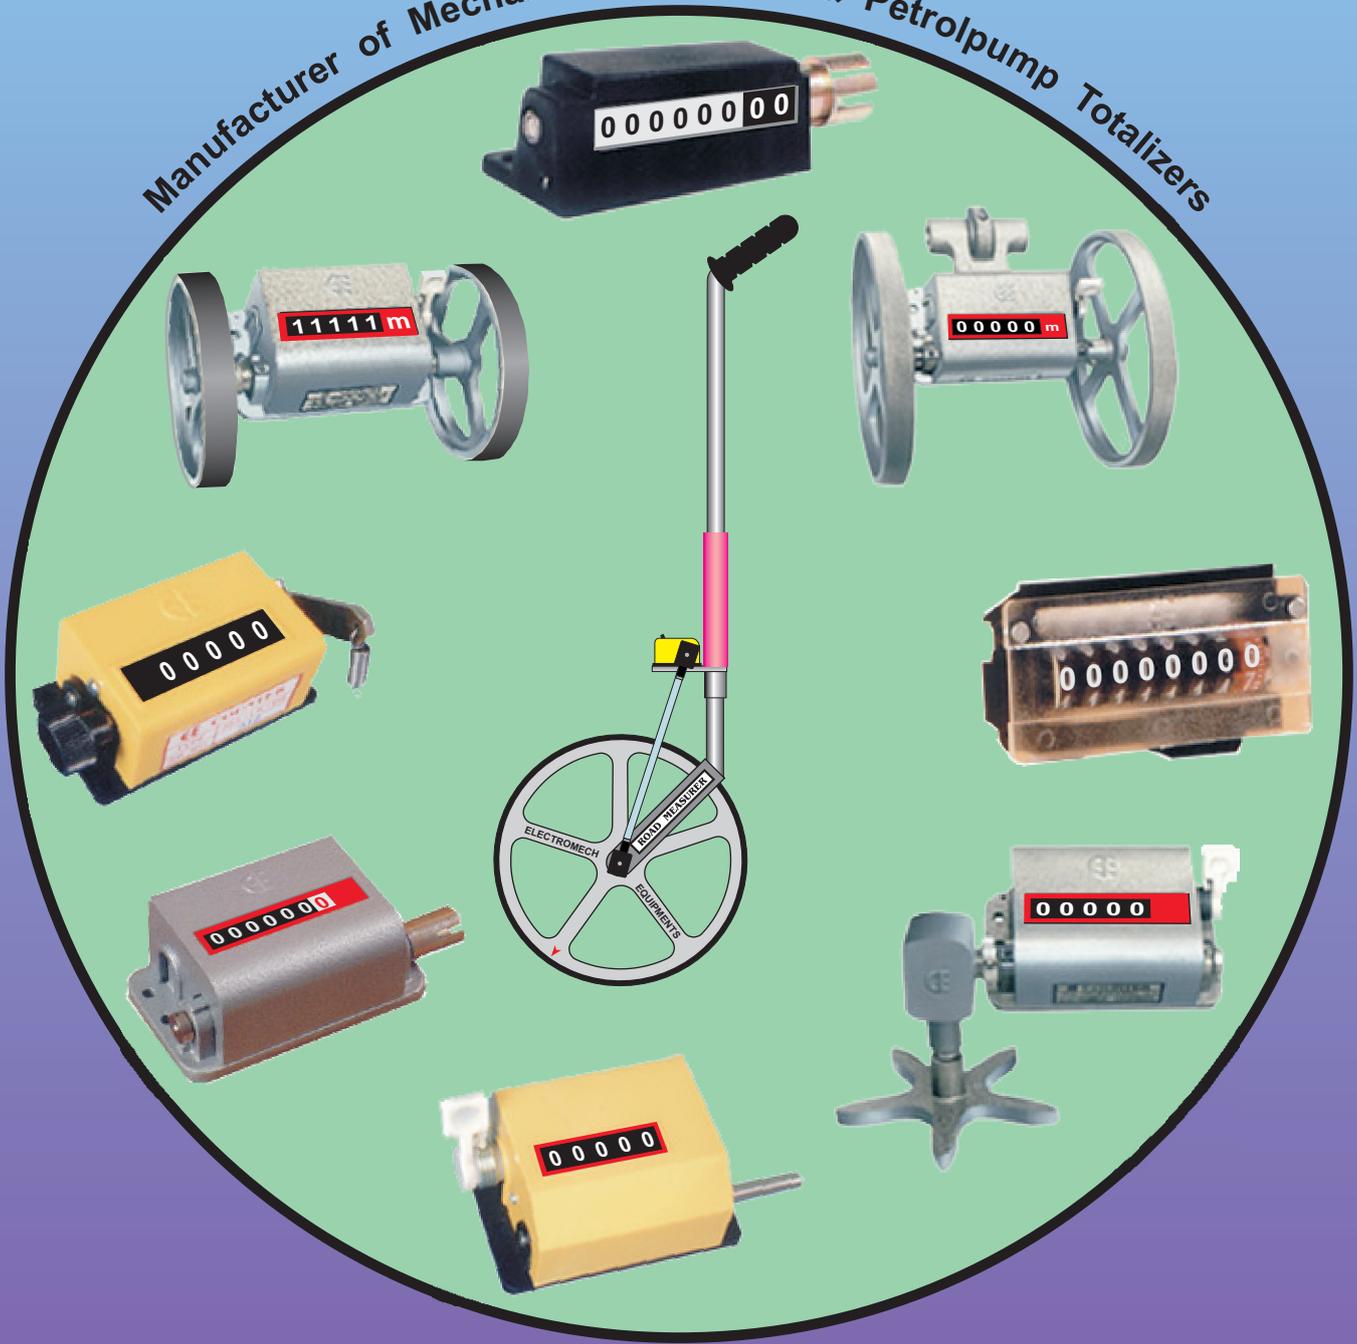


Quality Management System




ISO 9001 : 2008  
Cert. No. : 5797

# REVOLUTION COUNTER



## **MODEL : SR5**

- \* 5 Digits
- \* Quick Lever Reset ---- Left / Right
- \* Drive ---- Left / Right / Both
- \* Operation ---- Top Coming / Top Going
- \* Std Ratio ---- 1 : 1
- \* Other Ratio ---- 1 : 2, 1 : 3, 5 : 1, 10 : 1
- \* Speed ---- 2000 rpm
- \* Mounting holes ---- 4 Holes of 5.1 dia



## **MODEL : R040**


- \* 5 Digits
- \* Quick Lever Reset ---- Left / Right
- \* Drive ---- Left / Right / Both
- \* Drive Shaft dia ---- 4.5 mm / 6.35 mm
- \* Operation ---- Top Coming / Top Going
- \* Std Ratio ---- 1 : 1
- \* Speed ---- 2000 rpm
- \* Mounting slots ---- 2 Slots of 7mm x 4 mm

# STROKE COUNTERS



## **MODEL : JS5 ( Reset Type )**

- \* 5 Digits.
- \* Knob Reset ---- Left / Right.
- \* Drive ---- Left / Right.
- \* Operation ---- Top Comming / Top Going.
- \* Speed ---- 600 spm.
- \* Overall size ---- Approx. 76 (L) X 37 (W) X 31 (H).
- \* Mounting holes ---- 4 Holes of 3.5 dia.



## **MODEL : JS5 ( Non - Reset Type )**

- \* 5 Digits.
- \* Drive ---- Left / Right.
- \* Operation ---- Top Comming / Top Going.
- \* Speed ---- 600 spm.
- \* Overall size ---- Approx. 71 (L) X 37 (W) X 31 (H).
- \* Mounting holes ---- 4 Holes of 3.5 dia.



## **MODEL : ST5**

- \* 5 Digits
- \* Quick Lever Reset ---- Left / Right.
- \* Operation ---- Top Comming / Top Going.
- \* Speed ---- 600 spm.
- \* Overall Size ---- Approx. 164 (L) X 65 (W) X 50 (H).
- \* Mounting Holes — 4 Holes of 5.1 dia.

# MEASURING MACHINE



## **MODEL : MM2**

- \* Measures the length in meters with two wheels of 1/3 meter circumference.
- \* Hinge is not supplied in this model.


Wheels requirement to be specified :  
Knurled Aluminium Wheel ( KAW ) / Rubber Covered Wheel ( RCW )



## **MODEL : MM3**

- \* Measures the length in meters with two wheels of 1/3 meter circumference.
- \* The counter is fitted on a hinge for tilting.

Wheels requirement to be specified :  
Knurled Aluminium Wheel ( KAW ) / Rubber Covered Wheel ( RCW )



## **MODEL : MM4**

- \* Measures the length in meters & tents with one wheel of 1/2 meter circumference.
- \* The counter is fitted on a L bracket along with hinge for tilting.

Wheel requirement to be specified :  
Knurled Aluminium Wheel ( KAW ) / Rubber Covered Wheel ( RCW )



## **MODEL : MM5**

- \* Measures the length in meters & tents with two wheels of 1/2 meter circumference.
- \* The counter is fitted on a bracket with 12.7 mm dia bore.
- \* A stopper is provided to adjust pressure.

Wheels requirement to be specified :  
Knurled Aluminium Wheel ( KAW ) / Rubber Covered Wheel ( RCW )



## **MODEL : MM6**

- \* Measures the length in meters & 1/10 with two wheels of 1/2 meter circumference.
- \* Bracket & stopper not supplied in this model.

Wheels requirement to be specified :  
Knurled Aluminium Wheel ( KAW ) / Rubber Covered Wheel ( RCW )



## **MODEL : MM7**

- \* Measures the length in meters with two wheels of 1/3 meter circumference.
- \* The counter is fitted on a bracket, this is mounted on L bracket alongwith a stay rod of 12.7 mm ( 1/2 " ) dia.
- \* A stopper is provided to adjust pressure.

Wheels requirement to be specified :  
Knurled Aluminium Wheel ( KAW ) / Rubber Covered Wheel ( RCW )

# PETROLPUMP TOTALIZER




## **MODEL : SR7 / CR / NR**

- \* 7 Digits.
- \* Indicates litres & 1/10 th of a litre.
- \* Non reversible with stopping mechanism.
- \* 4 mounting holes of 5.1 dia.
- \* For L&T's old pumps and EXCEL - APLAB pumps.



## **MODEL : SR7 / DR / NR / RD**

- \* 7 Digits.
- \* Indicates litres & 1/10 th of a litre with 20 ml graduations.
- \* Non reversible with stopping mechanism.
- \* 4 mounting holes of 5.1 dia.
- \* For MIDCO and AVERY pumps.



## **MODEL : EPTZ8 / CR / NR**

- \* 8 Digits.
- \* Indicates litres & decilitres with 20 ml least count.
- \* Non reversible with one way bearing.
- \* Pressure die-cast housing.
- \* 2 mounting holes of 4.7 dia.
- \* Available with socket drive coupling / wire drive coupling.
- \* Compitable to VEEDER ROOT type for L&T's "Z" line.




## **MODEL : EPTV8 / CR / NR**

- \* 8 Digits.
- \* Indicates litres & 1/10 th of a litre with 20 ml graduations.
- \* Non reversible with one way bearing.
- \* Compatible to VICTOR type for MIDCO pumps.



## **MODEL : EPTZ9 / CR / NR**

- \* 9 Digits.
- \* Indicates litres & 1/10 th of a litre.
- \* Non reversible with one way bearing.
- \* Glassfilled Nylon moulded housing.
- \* 2 mounting holes of 4.7 dia.
- \* Available with socket drive coupling / wire drive coupling.
- \* Compitable to VEEDER ROOT type for L&T's "Z" line.



## **MODEL : EPTZ10 / CR / NR**

- \* 9 Digits.
- \* Indicates litres & 1/10 th of a litre with 20 ml least count.
- \* Non reversible with one way bearing.
- \* Glassfilled Nylon moulded housing.
- \* 2 mounting holes of 4.7 dia.
- \* Available with socket drive coupling / wire drive coupling.
- \* Compitable to VEEDER ROOT type for L&T's "Z" line.

# PRESET COUNTER



## MODEL : PRM5 ( REVOLUTION )

- \* 5 Digits
- \* Quick Lever Reset ---- Left / Right
- \* Drive ---- Left / Right / Both
- \* Operation ---- Top Coming / Top Going.
- \* Counts down to operate a microswitch.
- \* Std Ratio ---- 1 : 1
- \* Other Ratio ---- 1 : 2, 1 : 3, 5 : 1, 10 : 1
- \* Speed ---- 1440 rpm.
- \* Mounting holes ---- 4 Holes of 5.1 dia



## MODEL : PTM5 ( STROKE )

- \* 5 Digits.
- \* Quick Lever Reset ---- Left / Right
- \* Drive ---- Left / Right
- \* Operation ---- Top Coming / Top Going
- \* Counts down to operate a microswitch.
- \* Speed ---- 500 spm.
- \* Mounting holes ---- 4 Holes of 5.1 dia.

# SPECIAL PURPOSE COUNTER



## MODEL : CR06K CR ( ANEMOMETER COUNTER )

- \* 6 Digits
- \* Drive ---- Left Side.
- \* Used by Meterological Department.



## MODEL : BC5 ( BOTTLE COUNTER )

- \* 5 Digits
- \* Quick Lever Reset ---- Left / Right.
- \* Drive ---- Left / Right.
- \* Operation ---- Top Coming / Top Going
- \* Used in bottling & canning plants.

# ROAD MEASURER

“ MEASURE WITH PLEASURE AS YOU MOVE ”


## AN ACCURATE, CONVENIENT & RAPID WAY TO MEASURE DISTANCE

Road Measurer consists of Senior Counter with pressure diecasted base, moulded cover, diecasted wheel duly machined to size and covered with hard rubber.

Measures upto 9999.9 meters. Available with folding handle and attractive rexin carrying bag to facilitate easy transportation.

Useful for : \* MTNL, \* Surveyors, \* Civil Engineers, \* Road Contractors, \* Municipal Engineers, \* Public Works Departments, \* Electric Supply Undertakings, \* Gas Supply Undertakings.....


### **MODEL : RM5 ( 1 m circumference wheel )**

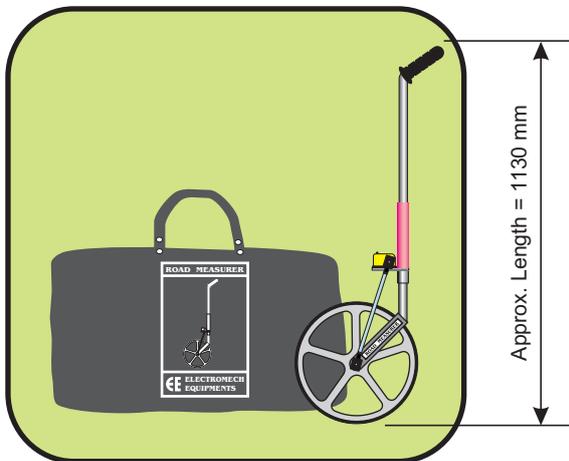

Approximate dimension & weight alongwith rexine bag



Size : L - 23" X W - 6" X H - 14"  
Weight : 2.750 Kg approx.

### **MODEL : JRM5 ( ½ m circumference wheel )**

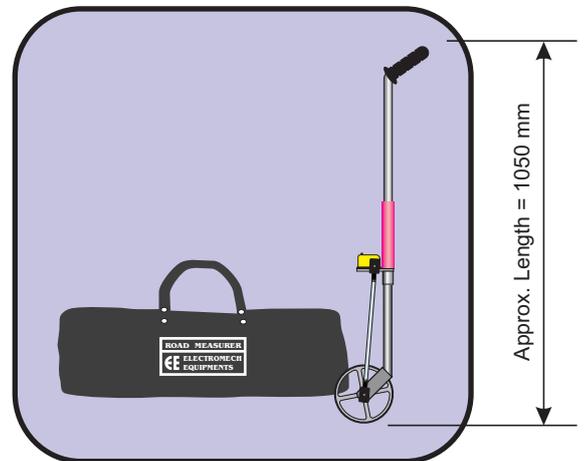

Approximate dimension & weight alongwith rexine bag

Size : L - 23" X W - 6" X H - 7"  
Weight : 2.110 Kg approx.

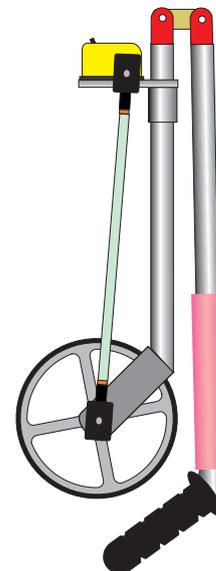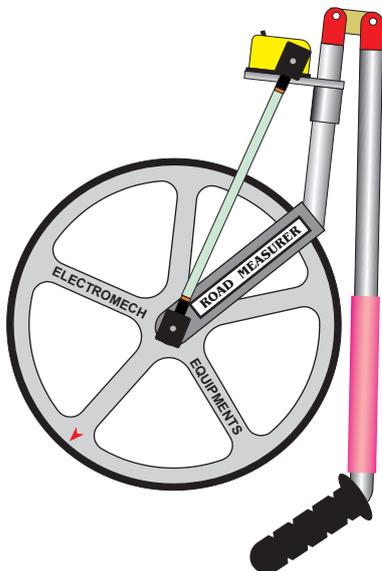

( The above photos, sketches & specifications are for representation purpose and may differ from the actual product. )  
( Due to continues innovative developments we reserve the rights to change the specifications without notice )


# RAIL TRACK MEASURER

“ MEASURE WITH PLEASURE AS YOU MOVE ”


## AN ACCURATE, CONVENIENT & RAPID WAY TO MEASURE TRACK LENGTH

This robust Rail Track Measurer incorporates  $\frac{1}{2}$  m circumference measuring wheel with a flange so that the wheel is balanced and in proper contact with the track whose length is to be measured


- Folding Handle Shaft.
- Supplied in rexine carrying bag.
- Easy to carry and transport.
- Gross weight approx. 5.5 kg with carrying bag.

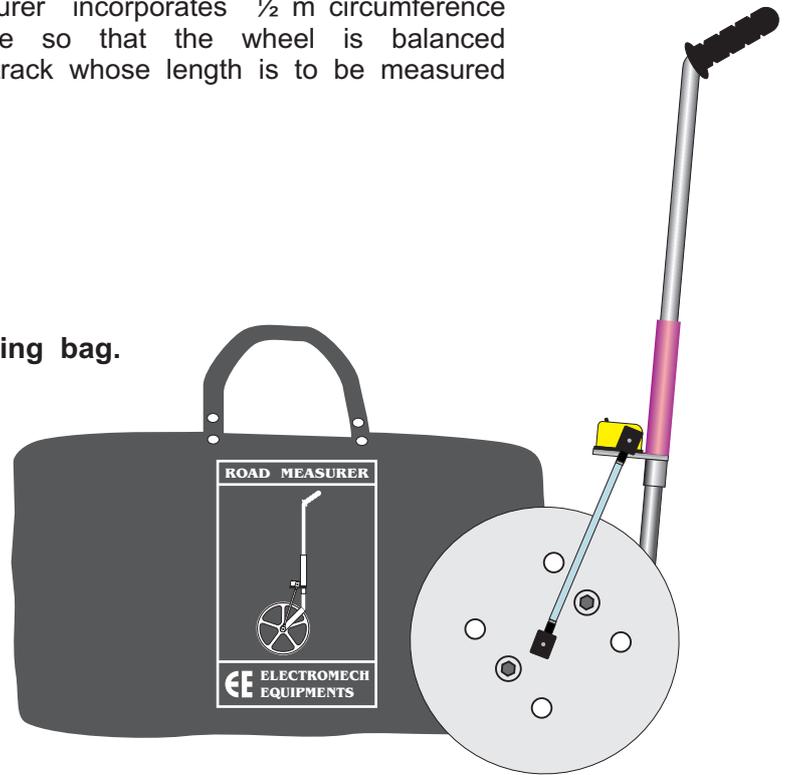

**MODEL : RTM5**  
**(  $\frac{1}{2}$  m circumference wheel )**

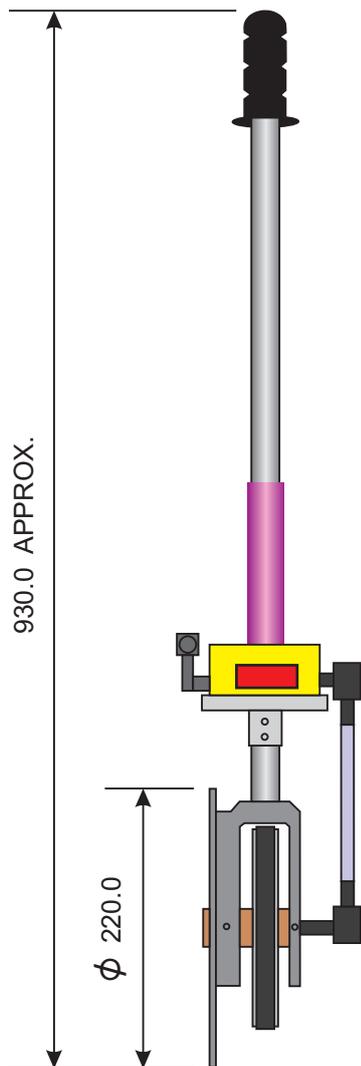

ALL DIMENSIONS ARE IN M.M.

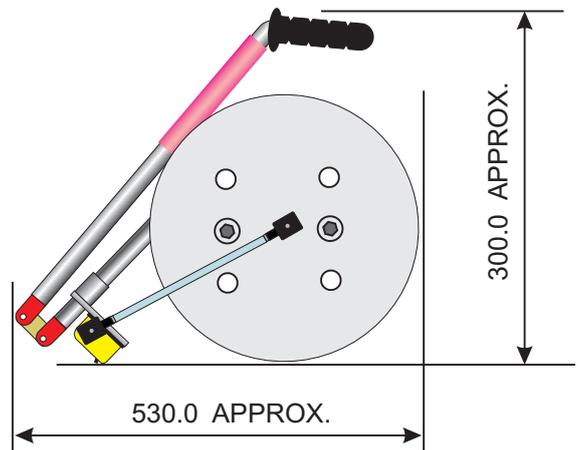

( The above photos, coloured sketches & specifications are for representation purpose and may differ from the actual product. )  
( Due to continues innovative developments we reserve the rights to change the specifications without notice )



**ELECTROMECH  
EQUIPMENTS**

Address :

302, K. K. Gupta Industrial Estate,  
Dr. R. P. Road, Opp Jawahar Talkies,  
Mulund West, Mumbai - 400 080.

E-mail :

[electromech equipments@rediffmail.com](mailto:electromech equipments@rediffmail.com)  
[sales@electromechequipments.com](mailto:sales@electromechequipments.com)  
[info@electromechequipments.com](mailto:info@electromechequipments.com)

TeleFax :

2564 8067, 2164 0691

Cell :

92234 16817, 80820 11033, 98673 98067

Visit us at :

<http://www.electromechequipments.com>